



Flatdecks



- CLASSIC FLATDECK W/ SINGLES (FS)
- CLASSIC FLATDECK W/ DUALS (FD)
- FLATDECK WITH HYDRAULIC DOVE (FY)
- LOW-PRO FLATDECK W/ DUALS (LD)
- LOW-PRO W/ HYDRAULIC DOVE (LY)
- 8" I-BEAM DECKOVER (F8)





Classic Flatdeck with Singles

FS



Lengths
20' - 40'

Standard Features


- 15,680 lb. G.V.W.R.
- 7,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Posi-lube Brake Axles (7,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 16" White Spoke Wheels
- 4 - 235/80R16 Radial Tires (3,520 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox (GN Only)
- 8' Ramps w/ Holders
- 12" x 14 lb. I-Beam Main Frame, Riser & Neck
- Frame Bridge Standard on 30' and up.
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

Notes:

- 30' and up, upgrade to triple axle recommended
- 30' and up, upgrade to 19 lb. I-Beam recommended

POWDER COATED

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

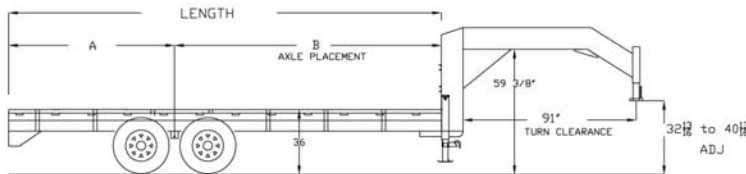

| Classic Flatdeck with Singles | | |
|-------------------------------|------|------|
| Length | A | B |
| 20' | 92" | 148" |
| 22' | 102" | 162" |
| 24' | 112" | 176" |
| 25' | 115" | 185" |
| 26' | 114" | 198" |
| 28' | 123" | 213" |
| 29' | 127" | 221" |

| Classic Flatdeck with Singles | | |
|-------------------------------|------|------|
| Length | A | B |
| 30' | 124" | 236" |
| 32' | 131" | 253" |
| 34' | 140" | 268" |
| 35' | 136" | 284" |
| 36' | 140" | 292" |
| 38' | 148" | 308" |
| 40' | 144" | 336" |

Weights

| Length | Axles | Est. Base Weight† |
|--------|----------|--------------------|
| 20' | 2 - 7000 | 4440 lbs / 2014 kg |
| 22' | 2 - 7000 | 4720 lbs / 2141 kg |
| 25' | 2 - 7000 | 5100 lbs / 2313 kg |
| 28' | 2 - 7000 | 5440 lbs / 2468 kg |
| 30' | 2 - 7000 | 5900 lbs / 2676 kg |
| 30' | 3 - 7000 | 6380 lbs / 2894 kg |



AIR RIDE SUSPENSION AVAILABLE



Also Available with a Bumper Pull or Pintle Coupler.

† Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights

Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox *
- Rigid mount 2-5/16 (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

Axle Options

- (2) 7,000# Electric / Spring *
 - (2) 7,000# Electric / Torsion
 - (2) 7,000# Elec/Hyd Disk / Spring
 - (2) 7,000# Elec/Hyd Disk / Torsion
 - (3) 7,000# Electric / Spring
 - (3) 7,000# Electric / Torsion
 - (2) 7,000# Load Range G 14ply Tires Electric / Spring
 - (2) 7,000# Load Range G 14ply Tires Electric / Torsion
 - (2) 7,000# Load Range G 14ply Tires Elec/Hyd Disk / Spring
 - (2) 7,000# Load Range G 14ply Tires Elec/Hyd Disk / Torsion
 - (3) 7,000# Load Range G 14ply Tires Electric / Spring
 - (3) 7,000# Load Range G 14ply Tires Electric / Torsion
- Consult Your Sales Rep. for Additional Available Axles

Tail Options

- Straight Deck w/ 8' Slide-in Ramps *
- 5' Dovetail w/ 5' Slide-in Ramps
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Split Pop-up Dove w/ 5' Slide-in Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Adjustable Dovetail w/ Slide in Ramps
- 5' Adjustable Dovetail w/ Stand Up Ramps
- 5' Dovetail w/ 3 Flip-over Ramps

Other Options

- 3/16" Diamond Plate Steel Floor & 4 D-Rings
- Mud Flaps Single Wheel Deckover
- Pipetop Rail
- Cold Weather Wiring Harness (7-Way RV)
- 16 lb. I-Beam Main Frame Plate for Winch
- Spare Tire Mount
- 6" Taller GN Riser
- Douglas Fir Lumber
- 1/4" Diamond Plate Steel Floor ²
- Under Frame Tie Down Flat
- 19 lb. I-Beam Main Frame, Riser & Neck
- 22 lb. I-Beam Main Frame, Riser & Neck ²
- 12"oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Hydraulic Jacks (12,000 lb.) ²
- Receiver Hitch
- Goodyear 14 Ply Tire **MUST ADD TO REG 14 PLY COST**
- 4" Ratchets every 4ft w/ Slide Track
- Side Mount Wood Rack
- 1 lga Diamond Plate Steel Floor & 4 D-Rings
- Front Toolbox (PH Only)
- Frame Bridging
- Diamond Plate Ramp Bottoms
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.)
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.)
- Ramp Support Arms

* Standard Feature

² Special Order Option: Requires additional lead-time



Classic Flatdeck with Duals



Lengths
20' - 40'

Standard Features


- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" BP
- 8 - 16" 235/80R16 Radial Tires (3,090 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox (GN Only)
- 8' Ramps w/ Holders
- 12" x 14 lb. I-Beam Main Frame, Riser & Neck
- Frame Bridge Standard on 30' and up.
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

Notes:

- 25' and up includes 19 lb. I-Beam Frame, Riser & Neck
- Pintlehooks must upgrade to 19 lb. I-Beam



At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

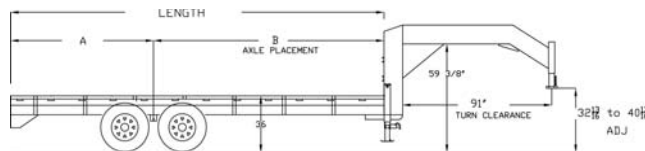

| Classic Flatdeck with Duals | | |
|-----------------------------|------|------|
| Length | A | B |
| 20' | 92" | 148" |
| 22' | 102" | 162" |
| 24' | 112" | 176" |
| 25' | 113" | 185" |
| 26' | 114" | 198" |
| 28' | 123" | 213" |
| 30' | 124" | 236" |
| 32' | 131" | 253" |

| Classic Flatdeck with Duals | | |
|-----------------------------|------|------|
| Length | A | B |
| 34' | 140" | 268" |
| 35' | 136" | 284" |
| 36' | 140" | 292" |
| 38' | 148" | 308" |
| 40' | 144" | 336" |

Weights

| Length | Axles | Est. Base Weight† |
|--------|-----------|--------------------|
| 20' | 2 - 10000 | 5340 lbs / 2422 kg |
| 22' | 2 - 10000 | 5480 lbs / 2486 kg |
| 25' | 2 - 10000 | 6200 lbs / 2812 kg |
| 28' | 2 - 10000 | 6860 lbs / 3112 kg |
| 30' | 2 - 10000 | 7100 lbs / 3221 kg |

| Length | Axles | Est. Base Weight† |
|--------|-----------|--------------------|
| 32' | 2 - 10000 | 7320 lbs / 3320 kg |
| 34' | 2 - 10000 | 7640 lbs / 3465 kg |
| 36' | 2 - 10000 | 8020 lbs / 3638 kg |
| 38' | 2 - 10000 | 8500 lbs / 3856 kg |
| 40' | 2 - 10000 | 8920 lbs / 4046 kg |

†Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights

Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox *
- BP 2 5/16" Adjustable (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

Axle Options

- (2) 10,000# Air / Spring
- (2) 10,000# Elec / Spring *
- (2) 10,000# Elec / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (3) 10,000# Elec / Spring
- (2) 12,000# Air / Spring
- (2) 12,000# Elec / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (3) 12,000# Elec / Spring
- (2) 12,000#, 14ply Air / Spring
- (2) 12,000#, 14ply Elec / Spring
- (2) 12,000#, 14ply Elec/Hyd Disk / Spring
- (2) 16,000# 17.5" wheel, Air / Spring
- (2) 16,000# 17.5" wheel, Elec / Spring
- Consult Your Sales Rep. for Additional Available Axles

Tail Options

- Straight Deck w/ 8' Slide-in Ramps *
- 5' Dovetail w/ 5' Slide-in Ramps
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Split Pop-up Dove w/ 5' Slide-in Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Dovetail w/ 3 Flip-over Ramps

Other Options

- Cold Weather Wiring Harness (7-Way RV)
- Hutch suspension H9700-Underslung Tandem Axle ²
- AL-KO Axles ²
- Hutch suspension H9700-Underslung Triple Axle ²
- Plate for Winch
- Spare Tire Mount
- 6" Taller GN Riser
- Douglas Fir Lumber
- 1/4" Diamond Plate Steel Floor ²
- Under Frame Tie Down Flat
- 19 lb. I-Beam Main Frame, Riser & Neck
- 22 lb. I-Beam Main Frame, Riser & Neck ²
- 12"oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Hydraulic Jacks (12,000 lb.) Incl. Front Toolbox ²
- Receiver Hitch
- Goodyear G Rated Tires
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Steel Floor & 4 D-Rings (Cut Fenders)
- Front Toolbox (PH Only)
- Frame Bridging
- Diamond Plate Ramp Bottoms
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.) No Frt T/box
- Ramp Support Arms

* Standard Feature

² Special Order Option: Requires additional lead-time



Also Available with a Bumper Pull or Pintle Coupler.



Flatdeck with Hydraulic Dove




Lengths
30' - 40'

Standard Features

- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" Bolt Pattern
- 8 - 16" 235/80R16 Radial Tires (3,090 lb.)
- Interstate Deep Cycle Battery
- Self Contained Hydraulic Unit
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox (GN Only)
- 10' Hydraulic Dovetail
- 12" x 19 lb. I-Beam Main Frame, Riser & Neck
- Frame Bridging
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

POWDER COATED

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

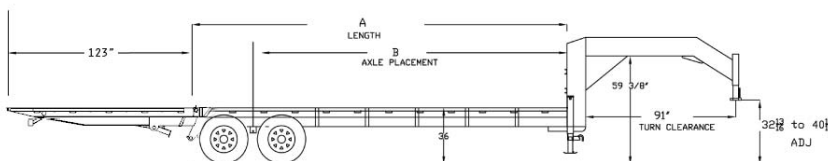

| Flatdeck with Hydraulic Dove | | |
|------------------------------|------|------|
| Length | A | B |
| 28' | 228" | 192" |
| 30' | 252" | 216" |
| 32' | 276" | 240" |
| 34' | 300" | 264" |
| 35' | 312" | 276" |
| 36' | 324" | 288" |
| 38' | 348" | 312" |
| 40' | 372" | 336" |

Weights

| Length | Axles | Est. Base Weight† |
|--------|-----------|--------------------|
| 30' | 2 - 10000 | 7860 lbs / 3565 kg |
| 32' | 2 - 10000 | 8200 lbs / 3719 kg |
| 34' | 2 - 10000 | 8520 lbs / 3865 kg |
| 36' | 2 - 10000 | 8700 lbs / 3946 kg |
| 38' | 2 - 10000 | 9020 lbs / 4091 kg |
| 40' | 2 - 10000 | 9320 lbs / 4227 kg |



AIR RIDE SUSPENSION AVAILABLE

†Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights

Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox *
- Ball Coupler 2 5/16" Adjustable (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

Axle Options

- (2) 10,000# Air / Spring
- (2) 10,000# Electric / Spring *
- (2) 10,000# Electric / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (3) 10,000# Air / Spring
- (3) 10,000# Electric / Spring
- (3) 10,000# Electric / Torsion
- (2) 10,000# Axle w/Single 17.5 Tires Electric / Spring
- (3) 10,000# Axle w/Single 17.5 Tires Electric / Spring
- (2) 10k Dexter Axles Electric / Spring
- (2) 12,000# Air / Spring
- (2) 12,000# Electric / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (3) 12,000# Air / Spring
- (3) 12,000# Electric / Spring
- (3) 12,000# Elec/Hyd Disk / Spring
- (2) 12,000# Load Range G Tires Air / Spring
- (2) 12,000# Load Range G Tires Electric / Spring
- (2) 12,000# Load Range G Tires Elec/Hyd Disk / Spring
- (2) 12k Dexter Axles Electric / Spring
- (2) 16000# 215/75R17.5 Tires Air / Spring
- (2) 16000# 215/75R17.5 Tires Electric / Spring
- Consult Your Sales Rep. for Additional Available Axles

Tail Options

10' Hydraulic Dovetail *

Other Options

- Cold Weather Wiring Harness (7-Way RV)
- Hutch suspension H9700-Underslung Tandem Axle ²
- AL-KO Axles ²
- Hutch suspension H9700-Underslung Triple Axle ²
- Plate for Winch
- 6" Taller GN Riser
- Douglas Fir Lumber
- Under Frame Tie Down Flat
- Battery Charger 12V
- 22 lb. I-Beam Main Frame & Neck ²
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Hydraulic Jacks (12,000 lb.) Incl. Front Toolbox ²
- Goodyear G Rated Tires
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Steel Floor
- Front Toolbox (PH Only)
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.) No Frt T/box

* Standard Feature

² Special Order Option: Requires additional lead-time



Also Available with a Bumper Pull or Pintle Coupler.



Low-Pro Flatdeck with Duals

LD




Lengths
20' - 40'

Standard Features

- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" BP
- 8 - 16" 245/75R16 Radial Tires (2,778 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- 2" x 6" Square Tubing
- Front Toolbox (GN Only)
- 8' Ramps w/ Holders
- 12" x 14 lb. I-Beam Tongue (to 27')
- 12" x 14 lb. I-Beam Main Frame (to 27')
- 3" Channel Crossmembers 16" on Center
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted
- Acid Washed



At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

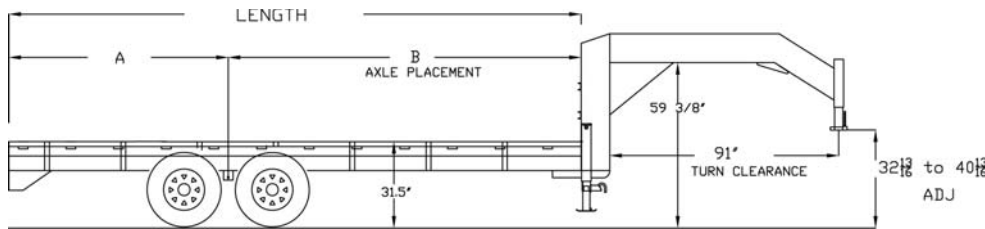

| LowPro Flatdeck with Duals | | |
|----------------------------|------|------|
| Length | A | B |
| 20' | 92" | 148" |
| 22' | 102" | 162" |
| 24' | 112" | 176" |
| 25' | 115" | 185" |
| 26' | 114" | 198" |
| 28' | 123" | 213" |
| 30' | 124" | 236" |
| 32' | 131" | 253" |

| LowPro Flatdeck with Duals | | |
|----------------------------|------|------|
| Length | A | B |
| 34' | 140" | 268" |
| 35' | 136" | 284" |
| 36' | 140" | 292" |
| 38' | 148" | 308" |
| 40' | 144" | 336" |

Weights

| Length | Axles | Est. Base Weight† |
|--------|-----------|--------------------|
| 20' | 2 - 10000 | 5780 lbs / 2622 kg |
| 22' | 2 - 10000 | 5920 lbs / 2685 kg |
| 25' | 2 - 10000 | 6300 lbs / 2858 kg |
| 28' | 2 - 10000 | 6840 lbs / 3103 kg |
| 30' | 2 - 10000 | 7240 lbs / 3284 kg |

| Length | Axles | Est. Base Weight† |
|--------|-----------|--------------------|
| 32' | 2 - 10000 | 7560 lbs / 3429 kg |
| 34' | 2 - 10000 | 7820 lbs / 3547 kg |
| 36' | 2 - 10000 | 8200 lbs / 3719 kg |
| 38' | 2 - 10000 | 8520 lbs / 3865 kg |
| 40' | 2 - 10000 | 8780 lbs / 3983 kg |

Coupler Options

- GN 2 5/16" Round (25,000 lb.) *
- BP 2 5/16" Adjustable (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.)
- GN Load-Leveling 2 5/16" Square (30,000 lb.)
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.)
- GN 2 5/16" Square (25,000 lb.)

Axle Options

- (2) 10,000# Air / Spring
- (2) 10,000# Elec / Spring *
- (2) 10,000# Elec / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (3) 10,000# Air / Spring
- (3) 10,000# Elec / Spring
- (3) 10,000# Elec / Torsion
- (3) 10,000# Elec/Hyd Disk / Spring
- (2) 12,000# Air / Spring
- (2) 12,000# Elec / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (3) 12,000# Air / Spring
- (3) 12,000# Elec / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (2) 16,000# 17.5" wheel, Air / Spring
- (2) 16,000# 17.5" wheel, Elec / Spring

Tail Options

- Straight Deck w/ 2 Slide-in Ramps *
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Dovetail w/ 3 Flip-over Ramps

Other Options

- 6" Taller GN Riser
- 19 lb. I-Beam MainFrame & Neck
- 22 lb. I-Beam MainFrame & Neck (from 19 lb.)
- 12"oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Receiver Hitch
- 4" Ratchets every 4ft w/ Slide Rack
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Steel Floor & 4 D-Rings
- Diamond Plate Ramp Bottoms
- Torque Tube
- Deck on the Neck
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.)
- 2-speed Jacks (12,000 lb. rating)

Notes:

- 30' and up includes Frame Bridging

* Standard Feature

‡ Special Order Option: Requires additional lead-time



Also Available with a Bumper Pull or Pintle Coupler.



AIR RIDE SUSPENSION AVAILABLE

† Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights



Low-Pro with Hydraulic Dove



Lengths
30' - 40'

Standard Features

- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" Bolt Pattern
- 8 - 16" 245/75R16 Radial Tires (2,778 lb.)
- Interstate Deep Cycle Battery
- Self Contained Hydraulic Unit
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox (GN Only)
- 10' Hydraulic Dovetail
- 12" x 19 lb. I-Beam Main Frame, Riser & Neck
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

POWDER COATED

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox *
- Ball Coupler 2 5/16" Adjustable (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

Axle Options

- (2) 10,000# Air / Spring
- (2) 10,000# Electric / Spring *
- (2) 10,000# Electric / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (3) 10,000# Air / Spring
- (3) 10,000# Electric / Spring
- (3) 10,000# Electric / Torsion
- (3) 10,000# Elec/Hyd Disk / Spring
- (2) 10k Dexter Axles Electric / Spring
- (2) 12,000# Air / Spring
- (2) 12,000# Electric / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (3) 12,000# Air / Spring
- (3) 12,000# Electric / Spring
- (3) 12,000# Elec/Hyd Disk / Spring
- (2) 12k Dexter Axles Electric / Spring

Tail Options

- 10' Hydraulic Dovetail *

Other Options


- Cold Weather Wiring Harness (7-Way RV)
- Hutch suspension H9700-Underslung Tandem Axle ²
- AL-KO Axles ²
- Hutch suspension H9700-Underslung Triple Axle ²
- Plate for Winch
- 6" Taller GN Riser
- Douglas Fir Lumber
- Under Frame Tie Down Flat
- Battery Charger 12V
- 22 lb. I-Beam Main Frame & Neck ²
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Hydraulic Jacks (12,000 lb.) Incl. Front Toolbox ²
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Front Toolbox (PH Only)
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.) No Frt T/box

* Standard Feature

² Special Order Option: Requires additional lead-time



Also Available with a Bumper Pull or Pintle Coupler.

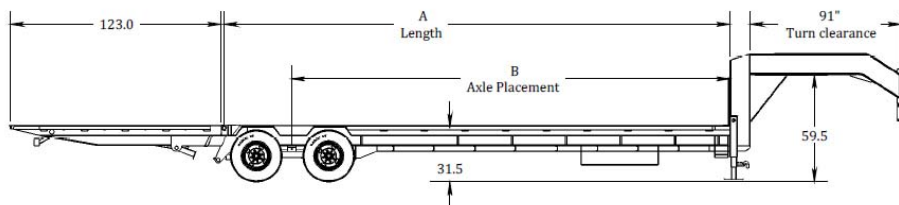

| LowPro with Hydraulic Dove | | |
|----------------------------|------|------|
| Length | A | B |
| 28' | 228" | 192" |
| 30' | 252" | 216" |
| 32' | 276" | 240" |
| 34' | 300" | 264" |
| 35' | 312" | 276" |
| 36' | 324" | 288" |
| 38' | 348" | 312" |
| 40' | 372" | 336" |

Weights

| Length | Axles | Est. Base Weight [†] |
|--------|-----------|-------------------------------|
| 30' | 2 - 10000 | 7840 lbs / 3556 kg |
| 32' | 2 - 10000 | 8080 lbs / 3665 kg |
| 34' | 2 - 10000 | 8400 lbs / 3810 kg |
| 36' | 2 - 10000 | 8700 lbs / 3946 kg |

[†] Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights



AIR RIDE SUSPENSION AVAILABLE



8" I-Beam Deckover

F8




Lengths
16' - 26'

Standard Features

- Front Toolbox (GN Only)
- 14,000 lb. G.V.W.R.
- 7,000 lb. x 2 G.A.W.R.
- 2 5/16" Adjustable Ball Coupler
- Safety Chains
- 1 - Drop Leg Jack (10,000 lb.)
- 2 - Posi-lube Brake Axles (7,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 16" White Spoke Wheels
- 4 - 235/80R16 Radial Tires (3,520 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Tool Tray
- 6' 6" Slide in Ramps w/ Holders
- 8" x 10 lb. I-Beam Tongue
- 8" x 10 lb. I-Beam Main Frame
- 3" Channel Crossmembers 16" on Center
- 2" Treated Pine Lumber Deck
- 96" Wide Deck
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated



At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

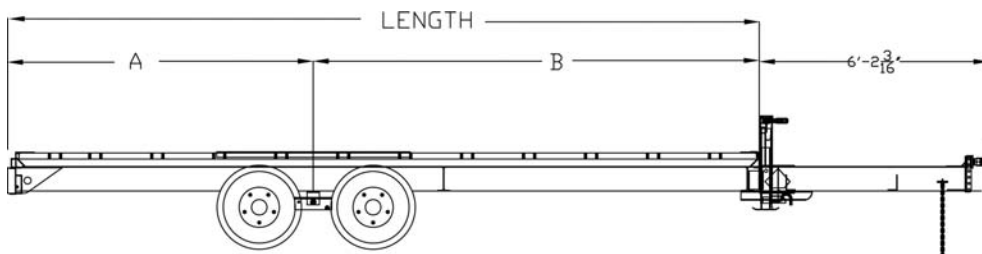

| 8" I-Beam Deckover | | |
|--------------------|------|------|
| Length | A | B |
| 16' | 77" | 115" |
| 18' | 86" | 130" |
| 20' | 92" | 148" |
| 22' | 102" | 162" |
| 24' | 112" | 176" |
| 26' | 114" | 198" |



AIR RIDE SUSPENSION AVAILABLE

Weights

| Length | Axles | Est. Base Weight [†] |
|--------|----------|-------------------------------|
| 16' | 2 - 7000 | 3200 lbs / 1451 kg |
| 18' | 2 - 7000 | 3400 lbs / 1542 kg |
| 20' | 2 - 7000 | 3600 lbs / 1633 kg |
| 20' GN | 2 - 7000 | 4100 lbs / 1860 kg |

| Length | Axles | Est. Base Weight [†] |
|--------|----------|-------------------------------|
| 22' | 2 - 7000 | 3820 lbs / 1733 kg |
| 24' | 2 - 7000 | 4060 lbs / 1842 kg |
| 26' | 2 - 7000 | 4340 lbs / 1969 kg |

[†]Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights

Coupler Options

- BP 2 5/16" Adjustable (14,000 lb.) *
- Rigid mount 2-5/16 (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Channel-mount (21,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Round (25,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

Axle Options

- (2) 5,200# Electric / Spring
- (3) 5,200# Electric / Spring
- (2) 7,000# Electric / Spring *
- (2) 7,000# Electric / Torsion
- (2) 7,000# Hydraulic Drum / Spring
- (2) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Elec/Hyd Disk / Torsion
- (3) 7,000# Electric / Spring
- (3) 7,000# Electric / Torsion
- (3) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Load Range G 14ply Tires Electric / Spring
- (3) 7,000# Load Range G 14ply Tires Electric / Spring
- (2) 8,000# Oil Bath Axles w / 235-80 Tires Electric / Spring
- (2) 8,000# Load Range G Tires Electric / Spring

Tail Options

- Straight Deck w/ 6'6" Slide-in Ramps *
- 3' Dovetail w/ 5' Slide-in Ramps (18' and up)
- 3' Dovetail w/ 2, 18"x60" Foldup Ramps
- 3' Dovetail w/ 3, 18"x60" Foldup Ramps
- 3' Dovetail w/ 2, 31"x66" Foldup Ramps
- 5' dove with 2 Flipover Ramps (Must Have R option)
- 5' dove with 3 Flipover Ramps (Must Have R option)

Other Options

- Cold Weather Wiring Harness (7-Way RV)
- Plate for Winch
- 6" Taller GN Riser
- Douglas Fir Decking
- 9,990 G.V.W.R.
- 12"oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- 2nd Jack
- Receiver Hitch
- Goodyear G Rated Tires
- 4" Ratchets every 4ft w/ Slide Track
- Mount Only for Spare Tire
- 1/4" Diamond Plate Steel Floor
- Steel Floor & 4 D-Rings
- Front Toolbox (Bumper Pull)
- 102" Deck Width
- Rear Support Jacks (Dovetail and 96"Only)
- Spare Tire and Mount (Bumper Pull)
- Deck on the Neck (GN Only)
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- 2-speed Jacks (12,000 lb.)

* Standard Feature

² Special Order Option: Requires additional lead-time



Also Available with a Gooseneck Coupler

Flatdeck Options Guide

(some options not shown, please view the product page for a list of all options)

Tail Options



Straight Deck w/ 8' Slide-in Ramps



5' Dovetail w/ 2 Flip-Over Ramps



5' Center Pop-up Dove w/ 2 Flip-Over Ramps



5' Split Pop-up Dove w/ 5' Slide-in Ramps



5' Dovetail w/ 3 Flip-Over Ramps

Color Options



Black Powder Coat



Eq. Yellow Powder Coat



Grey Powder Coat



White Powder Coat



Red Powder Coat

Other Options



12" oc Crossmembers



D-Rings



Rough Oak Floor



Weld On Strap Ratchets (2)



Receiver Hitch



72" Axle Spread



Sliding Strap Ratchets



Steel Floor & 4 D-rings



2 Speed Jacks



Diamond Plate Ramp Bottoms



Torque Tube



Deck On The Neck



Side-Mount Toolbox



Wood Rack



TRAILER FLEX TrailerFlex Air Ride Suspension



PJ TRAILERS

- #1 Professional Grade Open Trailer Manufacturer
- Broad Line of Dumps, Flatdecks, Utilities, Tilts & Equipment Trailers
- Over 300 Independent PJ Trailers Dealer Locations in the US & Canada

Visit Us Online at www.pjtrailers.com

